

ISUZU

FORWARD



SAFETY PLUS

SRS
AIRBAG

ABS
ANTI-LOCK BRAKING SYSTEM

 **IMMOBILIZER**

4x2 RIGID
GVW 11,000kg

FRR
210

3
YEARS WARRANTY
OR
200,000 km
WHICHEVER
COMES FIRST

EURO 4

B20
DIESEL
COMPATIBLE

FREE
SERVICE CAMPAIGN
 **ISUZU**

Product image for illustration purposes only. Actual product may vary.

SPECIFICATIONS

FRR 210

MODEL CODE	FRR90SU-MA	
Drive Train	4 x 2	
ENGINE	4HK1-TCS	
Model	4-Cylinder In-line, 4 Cycle, Water-Cooled	
Type	OHC, Variable Geometry System (VGS) Turbocharger with Intercooler	
Displacement	cc	5,193
Maximum Output (Gross)	kW (PS) @ rpm	154 (210) @ 2600
Maximum Torque	Nm (kgfm) @ rpm	706 @ 1600
Emission Level	Euro 4	
Fuel System	Commonrail Direct Injection	
After Treatment Exhaust Gas	DOC (Diesel Oxidation Catalyst)	
TRANSMISSION	MZW-6P	
Model / No. of Speed	6-Speed MT	
Gear Ratio		
	1st	6.615
	2nd	4.095
	3rd	2.358
	4th	1.531
	5th	1.000
	6th	0.722
	Reverse	6.615
	Final	4.875
WEIGHT & CAPACITIES		
Gross Vehicle Weight	kg	11,000
Curb Weight	kg	3,270
Front	kg	2,020
Rear	kg	1,250
Fuel Tank Capacity	l	200
AXLE		
Front	Type	Reverse Elliot, I-Beam
Front Axle Capacity (Design)	kg	3,600
Rear	Type	Banjo, Full Floating
Rear Axle Capacity (Design)	kg	7,700
SUSPENSION SYSTEM		
Suspension	Front	Semi Elliptical Alloy Steel Leaf Spring with Double Acting Telescopic Shock Absorber
	Rear	Semi Elliptical Alloy Steel Leaf Spring
TYRES & WHEELS		
Tyres	235/75R17.5	
Wheels	17.5 X 6.75	
BRAKES		
Service	Type	Air Over Hydraulic Dual Circuit Front and Rear Drum Brakes
Parking Brake Type	Mechanical Operated Internal Expanding, Center	
Auxiliary	Exhaust Brake	
STEERING		
Steering System	Power Assist, Hydraulic Integral Recirculating Ball Type	
Min. Turning Radius	m	7.3
ELECTRICAL		
Battery	65D26L x 2	
Alternator	24V-60A	
OTHER SAFETY		
Active Safety	Anti-Locking Brake System (ABS)	
	Cab Tilt Warning (CTW)	
Passive Safety	Driver Supplemental Restraint System (SRS)	
	Driver Seatbelt Pre-tensioner	
Security	Central Locking with Remote Keyless Entry and Immobiliser	
DIMENSION		
Overall Length	mm	7,875
Overall Width	mm	2,200
Overall Height	mm	2,500
Wheelbase	mm	4,660
Front Overhang	mm	1,170
Rear Overhang	mm	2,045
Front Tread	mm	1,795
Rear Tread	mm	1,660

TESTED AND PROVEN POWERTRAIN



FRR 210 4HK1-TCS


Displacement: **5,193cc**
Max. Output (Gross): **154kW (210ps) @ 2,600rpm**
Max. Torque: **706Nm @ 1,600rpm**

210PS
Max Power

706Nm
Flat Torque

EURO 4

CLASS-LEADING SAFETY AND LONG TERM COST SAVINGS

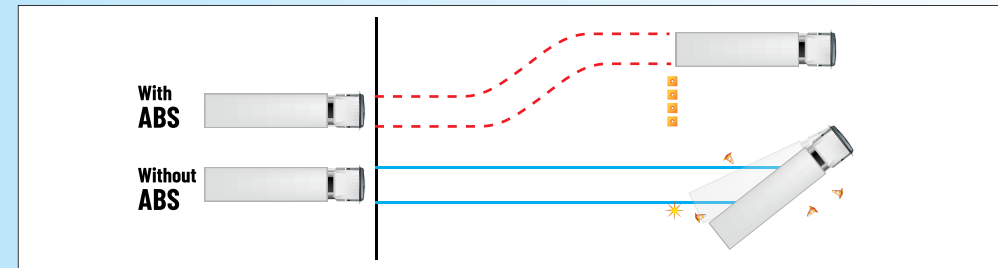

Anti-Lock Braking System (ABS)




*SRS airbag system and seat belt with pretensioner are activated in the event of a frontal collision, mitigating impact to the head and chest.

*Applicable for driver only.



Brand New Feature - USB Charging Port



Cabin Tilt Warning & Buzzer for driver safety warning



LED Headlight to provide better visibility

ISUZU

ISUZU MALAYSIA SDN BHD 200401026438 (664946-H)

501D, LEVEL 5, TOWER D, UPTOWN 5, NO.5, JALAN SS21/39,
DAMANSARA UPTOWN, 47400 PETALING JAYA, SELANGOR DARUL EHSAN.

GENERAL LINE: 03-7723 9777 FAX: 03-7723 9779

HOTLINE: 1-300-88-1133 www.isuzu.net.my

IsuzuTrucksMalaysia IsuzuTrucksMalaysia www.isuzu.net.my

ISUZU SERVICE CENTRE SDN BHD 201601034731 (1205672-X)

LOT 730, JALAN SG. RASAU, SECTION 16,
40200 SHAH ALAM, SELANGOR DARUL EHSAN.

PHONE: 03-5513 0518

FAX: 03-5512 7550

ISUZU
GENUINE PARTS

ISUZU
BEST VALUE PARTS

Dealer's information