

# ISUZU

# FORWARD



**SAFETY PLUS**

**SRS**  
**AIRBAG**

**ABS**  
ANTI-LOCK BRAKING SYSTEM

 **IMMOBILIZER**

**4x2 RIGID**  
GVW 19,000kg

**FVR**  
**240**

**3**  
YEARS WARRANTY  
OR  
200,000 km  
WHICHEVER  
COMES FIRST

**EURO 4**

**B20**  
— DIESEL —  
COMPATIBLE

**FREE**  
SERVICE CAMPAIGN  
 **ISUZU**

Product image for illustration purposes only. Actual product may vary.

# SPECIFICATIONS

# FVR240

MODEL CODE	FVR34UU-MD	FVR34UU-SD
Drive Train	4 x 2	
<b>ENGINE</b>		
Model	6HK1-TCN	
Type	6-Cylinder In-line, 4 Cycle, Water-Cooled OHC, Variable Geometry System (VGS) Turbocharger with Intercooler	
Displacement	cc 7,790	
Maximum Output (Gross)	kW (PS) @ rpm 177 (240) @ 2400	
Maximum Torque	Nm (kgfm) @ rpm 706 @ 1450	
Emission Level	Euro 4	
Fuel System	Commonrail Direct Injection	
After Treatment Exhaust Gas	DOC (Diesel Oxidation Catalyst)	
<b>TRANSMISSION</b>		
Model / No. of Speed	MZW-6P	
Gear Ratio	6-Speed MT	
	1st	6.615
	2nd	4.095
	3rd	2.358
	4th	1.531
	5th	1.000
	6th	0.722
	Reverse	6.615
	Final	6.170
<b>WEIGHT &amp; CAPACITIES</b>		
Gross Vehicle Weight	kg	19,000
Curb Weight	kg	5,370
Front	kg	3,150
Rear	kg	2,220
Fuel Tank Capacity	l	200
<b>AXLE</b>		
Front	Type	Reverse Elliot, I-Beam
Front Axle Capacity (Design)	kg	7,500
Rear	Type	Banjo, Full Floating
Rear Axle Capacity (Design)	kg	13,000
<b>SUSPENSION SYSTEM</b>		
Suspension	Front	Semi Elliptical Alloy Steel Leaf Spring with Double Acting Telescopic Shock Absorber
	Rear	Semi Elliptical Alloy Steel Leaf Spring
<b>TYRES &amp; WHEELS</b>		
Tyres	295/80R22.5	
Wheels	22.5 x 8.25	
<b>BRAKES</b>		
Service	Type	Full Air 'S-Cam' Front and Rear Drum Brakes
Parking Brake Type	Spring Park Brake Acting on all Rear Wheels	
Auxiliary	Exhaust Brake	
<b>STEERING</b>		
Steering System	Power Assist, Hydraulic Integral Recirculating Ball Type	
Min. Turning Radius	m	7.9
<b>ELECTRICAL</b>		
Battery	65D26L x 2	
Alternator	24V-60A	
<b>OTHER SAFETY</b>		
Active Safety	Anti-Locking Brake System (ABS)	
	Cab Tilt Warning (CTW)	
Passive Safety	Driver Supplemental Restraint System (SRS)	
	Driver Seatbelt Pre-tensioner	
Security	Central Locking with Remote Keyless Entry and Immobiliser	
<b>DIMENSION</b>		
Overall Length	mm	8,005
Overall Width	mm	2,490
Overall Height	mm	2,890
Wheelbase	mm	4,660
Front Overhang	mm	1,255
Rear Overhang	mm	2,090
Front Tread	mm	2,060
Rear Tread	mm	1,850

# TESTED AND PROVEN POWERTRAIN



## FVR 240 6HK1-TCN


Displacement: **7,790cc**  
Max. Output (Gross): **177kW (240ps) @ 2,400rpm**  
Max. Torque: **706Nm @ 1,450rpm**

**240PS**  
Max Power

**706Nm**  
Flat Torque

**EURO 4**

# CLASS-LEADING SAFETY AND LONG TERM COST SAVINGS

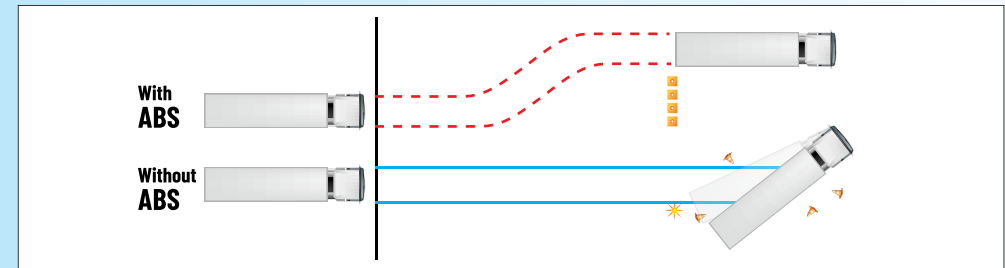

Anti-Lock Braking System (ABS)




\*SRS airbag system and seat belt with pretensioner are activated in the event of a frontal collision, mitigating impact to the head and chest.

\*Applicable for driver only.



Brand New Feature - USB Charging Port



Cabin Tilt Warning & Buzzer for driver safety warning



LED Headlight to provide better visibility

**ISUZU**

**ISUZU MALAYSIA SDN BHD** 200401026438 (664946-H)

501D, LEVEL 5, TOWER D, UPTOWN 5, NO.5, JALAN SS21/39,  
DAMANSARA UPTOWN, 47400 PETALING JAYA, SELANGOR DARUL EHSAN.

GENERAL LINE: 03-7723 9777 FAX: 03-7723 9779

HOTLINE: 1-300-88-1133 www.isuzu.net.my

[f IsuzuTrucksMalaysia](#) [IsuzuTrucksMalaysia](#) [www.isuzu.net.my](#)

**ISUZU SERVICE CENTRE SDN BHD** 201601034731 (1205672-X)

LOT 730, JALAN SG. RASAU, SECTION 16,  
40200 SHAH ALAM, SELANGOR DARUL EHSAN.

PHONE: 03-5513 0518

FAX: 03-5512 7550

**ISUZU**  
GENUINE PARTS

**ISUZU**  
BEST VALUE PARTS

Dealer's information