

ISUZU

FORWARD



SAFETY PLUS

SRS
AIRBAG

ABS
ANTI-LOCK BRAKING SYSTEM

IMMOBILIZER

4x2 RIGID
GVW 19,000kg

FVR
280

3
YEARS WARRANTY
OR
200,000 km
WHICHEVER
COMES FIRST

EURO 4

B20
DIESEL
COMPATIBLE

FREE
SERVICE CAMPAIGN
ISUZU

Product image for illustration purposes only. Actual product may vary.

SPECIFICATIONS

FVR280

| | | |
|------------------------------|--|--------------------------------------------------------------------------------------------------------------------------------------------|
| MODEL CODE | | FVR34UU-UDS |
| Drive Train | | 4 x 2 |
| ENGINE | | |
| Model | | 6HK1-TCS |
| Type | | 6-Cylinder In-line, 4 Cycle, Water-Cooled OHC, Variable Geometry System (VGS) Turbocharger with Intercooler |
| Displacement | | cc 7,790 |
| Maximum Output (Gross) | | kW (PS) @ rpm 206 (280) @ 2400 |
| Maximum Torque | | Nm (kgfm) @ rpm 883 @ 1450 |
| Emission Level | | Euro 4 |
| Fuel System | | Commonrail Direct Injection |
| After Treatment Exhaust Gas | | DOC (Diesel Oxidation Catalyst) |
| TRANSMISSION | | |
| Model / No. of Speed | | ES11109 |
| Gear Ratio | | 9-Speed MT |
| Crawler | | 12.637 |
| 1st | | 8.806 |
| 2nd | | 6.550 |
| 3rd | | 4.768 |
| 4th | | 3.548 |
| 5th | | 2.481 |
| 6th | | 1.845 |
| 7th | | 1.343 |
| 8th | | 1.000 |
| Reverse | | 13.210 |
| Final | | 4.880 |
| WEIGHT & CAPACITIES | | |
| Gross Vehicle Weight | | kg 19,000 |
| Curb Weight | | kg 5,820 |
| Front | | kg 3,440 |
| Rear | | kg 2,380 |
| Fuel Tank Capacity | | l 400 |
| AXLE | | |
| Front | | Type Reverse Elliot, I-Beam |
| Front Axle Capacity (Design) | | kg 7,500 |
| Rear | | Type Banjo, Full Floating |
| Rear Axle Capacity (Design) | | kg 13,000 |
| SUSPENSION SYSTEM | | |
| Suspension | | Front Semi Elliptical Alloy Steel Leaf Spring with Double Acting Telescopic Shock Absorber Rear Semi Elliptical Alloy Steel Leaf Spring |
| TYRES & WHEELS | | |
| Tyres | | 295/80R22.5 |
| Wheels | | 22.5 x 8.25 |
| BRAKES | | |
| Service | | Type Full Air 'S-Cam' Front and Rear Drum Brakes |
| Parking Brake Type | | Spring Park Brake Acting on all Rear Wheels |
| Auxiliary | | Exhaust Brake |
| STEERING | | |
| Steering System | | Power Assist, Hydraulic Integral Recirculating Ball Type |
| Min. Turning Radius | | m 10.9 |
| ELECTRICAL | | |
| Battery | | 65D26L x 2 |
| Alternator | | 24V-60A |
| OTHER SAFETY | | |
| Active Safety | | Anti-Locking Brake System (ABS) Cab Tilt Warning (CTW) |
| Passive Safety | | Driver Supplemental Restraint System (SRS) Driver Seatbelt Pre-tensioner |
| Security | | Central Locking with Remote Keyless Entry and Immobiliser |
| DIMENSION | | |
| Overall Length | | mm 10,955 |
| Overall Width | | mm 2,490 |
| Overall Height | | mm 2,885 |
| Wheelbase | | mm 6,600 |
| Front Overhang | | mm 1,255 |
| Rear Overhang | | mm 3,100 |
| Front Tread | | mm 2,090 |
| Rear Tread | | mm 1,850 |

ISUZU

ISUZU MALAYSIA SDN BHD 200401026438 (864946-H)


501D, LEVEL 5, TOWER D, UPTOWN 5, NO.5, JALAN SS21/39,
DAMANSARA UPTOWN, 47400 PETALING JAYA, SELANGOR DARUL EHSAN.
GENERAL LINE: 03-7723 9777 FAX: 03-7723 9779
HOTLINE: 1-300-88-1133 www.isuzu.net.my

IsuzuTrucksMalaysia IsuzuTrucksMalaysia www.isuzu.net.my

ISUZU SERVICE CENTRE SDN BHD 201601034731 (1205672-X)

LOT 730, JALAN SG. RASAU, SECTION 16,
40200 SHAH ALAM, SELANGOR DARUL EHSAN.
PHONE: 03-5513 0518
FAX: 03-5512 7550

TESTED AND PROVEN POWERTRAIN



FVR 280 6HK1-TCS


Displacement: **7,790cc**
Max. Output (Gross): **206kW (280ps) @ 2,400rpm**
Max. Torque: **883Nm @ 1,450rpm**

280PS
Max Power

883Nm
Flat Torque

EURO 4

CLASS-LEADING SAFETY AND LONG TERM COST SAVINGS

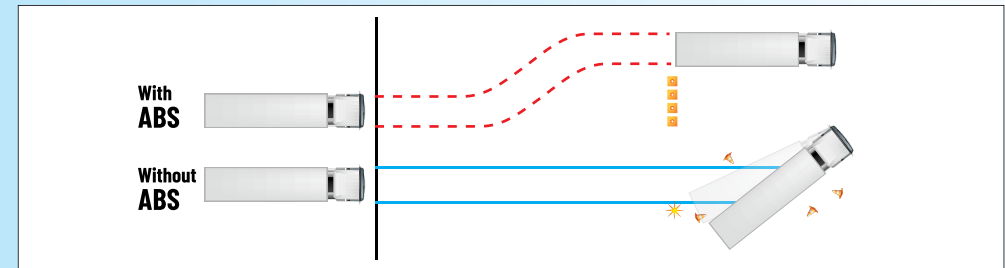

Anti-Lock Braking System (ABS)




*SRS airbag system and seat belt with pretensioner are activated in the event of a frontal collision, mitigating impact to the head and chest.

*Applicable for driver only.



Brand New Feature - USB Charging Port



Cabin Tilt Warning & Buzzer for driver safety warning



LED Headlight to provide better visibility

Dealer's information

ISUZU
GENUINE PARTS

ISUZU
BEST VALUE PARTS